




Technical data sheet – *Geothermal probes consisting of PE 100-RC with Safety probe foot®*



32 - safety probe foot®
(Ø 95 mm)

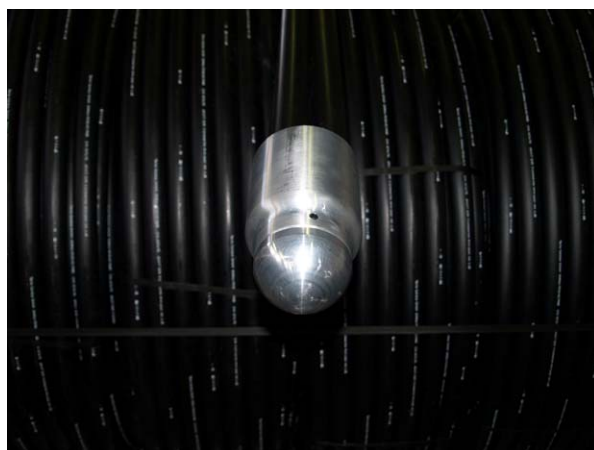

40 - safety probe foot®
(Ø 115 mm)

- Safety probe foot® is composed of metal
- The PE-100 RC probe foot is force-locked connected with the safety probe foot®
- Solid, space-saving construction with high fittings properties
- Homogeneous surface, thus no cant in the bore hole
- Good heat conductivity
- Threaded fastener for the installation with drill rod
- Integrated Spacer
- The installation weight can be screwed simply and force-locked



weight